

High-Definition Multimedia Interface

Version 2.0

Quantum Data MOI v1.0

Test ID: HF2-5

July 15, 2014

Preface

Notice

THIS DOCUMENT IS PROVIDED “AS IS” WITH NO WARRANTIES WHATSOEVER, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, NO WARRANTIES OF MERCHANTABILITY, NONINFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION, OR SAMPLE.

HDMI Forum, Inc. and its members disclaim all liability, including liability for infringement of any proprietary rights, relating to use of information in This Specification.

Document Revision History

1.0 July 15, 2014 – Initial Release.

Intellectual Property

Copyright partly in this document is owned by the HDMI Forum, Inc., who reserves all rights therein. The Forum hereby grants a copyright license to portions of this document that were created by the HDMI Forum for use by Test Equipment Makers, HDMI Adopters and HDMI ATCs and others that access this document through the HDMI Adopter Extranet to use this document for the testing of purported HDMI Licensed Products (as defined in the HDMI Adopters Agreement and the HDMI Adopters Addendum).

Copyright partly in this document is owned by **Quantum Data, Inc.**, who reserves all rights therein. By uploading or otherwise delivering this document for publication on the HDMI Extranet, **Quantum Data, Inc.** hereby grants a copyright license to portions of this document that were created by **Quantum Data, Inc.** to HDMI Adopters, HDMI ATCs and others that access this document through the HDMI Adopter Extranet to use this document for the testing of purported HDMI Licensed Products.

Only versions of this document that are approved and considered the current versions may be used by HDMI Adopters for compliance testing.

No charge or fee is associated with such copyright license grant provided herein.

Contact Information

The URL for the HDMI Forum web site is: <http://www.hdmiforum.org/>

The URL for the **Quantum Data, Inc.** website is: <http://www.quantumdata.com>.

Table of Contents

Preface.....	2
<i>Notice.....</i>	<i>2</i>
Document Revision History.....	2
<i>Intellectual Property</i>	<i>2</i>
<i>Contact Information</i>	<i>2</i>
Introduction	4
Scope	4
References Document	4
<i>Normative References</i>	<i>4</i>
<i>Informative Reference</i>	<i>4</i>
Test ID HF2-5: Sink TMDS Protocol – 6G – Scrambling	5
<i>Objective</i>	<i>5</i>
<i>Reference</i>	<i>5</i>
<i>Requirement</i>	<i>5</i>
<i>Capability(s)</i>	<i>5</i>
<i>Test Equipment</i>	<i>5</i>
<i>Generic Procedure.....</i>	<i>5</i>
<i>Vendor Specific Test Procedure</i>	<i>6</i>

Introduction

This document provides a set of Method of Implementation for test method described in HDMI Compliance Test Specification Version 2.0 (HDMI CTS 2.0). HDMI Forum created HDMI CTS 2.0 to specify a set of tests that should be performed to verify features described in HDMI Specification Version 2.0.

Scope

This document provides testing procedures for HDMI CTS 2.0 Test ID HF2-5: Sink TMDS Protocol – 6G – Scrambling.” The procedure below deals with single resolution and only one Test ID is considered at a time.

References Document

Normative References

High-Definition Multimedia Interface Specification Version 1.4b, October 11, 2011.
HDMI Compliance Test Specification Version 1.4b, October 11, 2011.
High-Definition Multimedia Interface Specification Version 2.0, August, 2013.
HDMI Compliance Test Specification Version 2.0,

Informative Reference

No additional informative references.

Test ID HF2-5: Sink TMDS Protocol – 6G – Scrambling

Objective

Confirm that the Sink sets the Scrambling_Status bit to a 1.

Table 8-13 Sink TMDS Protocol - 6G – Scrambling Status Requirements

Reference	Requirement
[HDMI 2.0: 6.1.3.1] Scrambling Control	<See reference for details>
[HDMI 2.0: 10.4.1.4] TMDS Configuration	<See reference for details>
[HDMI 2.0: 10.4.1.5] Scrambling Status	<See reference for details>

Capability(s)

The Sink DUT supports any Video Format/color mode for TMDS Character Rate above 340Mcsc up to 600Mcsc.

Test Equipment

Item	Generic Equipment	Vendor Specific Equipment	Quantity
1	TMDS Signal Generator	980 Advanced Test Platform series:	1
1	I2C Analyzer	980 HDMI 2.0 Video Generator module HDMI CTS 2.0 Compliance Test Package #4	

Generic Procedure

- 1 If the CDF field Sink_Above_340 is “N”, then SKIP this test.

Setup:

- 2 Connect the TMDS Signal Generator to the Sink DUT.
- 3 Use the I2C Analyzer to write 1 to the Scrambling_Enable bit of the Sink DUT.
- 4 Configure the TMDS Signal Generator to output any Video Format for TMDS Character Rate above 340Mcsc and up to 600Mcsc without the exception specified in [HDMI 2.0: 6.1.2.4.1].

Measure:

- 5 Read the Scrambling_Status bit with the I2C Analyzer.
- 6 If the Sink DUT does not set the Scrambling_Status bit to 1, then FAIL.
- 7 If the Sink DUT does not adequately support the format, then FAIL.

Vendor Specific Test Procedure

Test Equipment

A variety of equipment is needed for testing HDMI products. Each piece is authorized and included by name in this Compliance Test Specification. This section describes the Quantum Data test equipment.


HDMI 2.0 Video Generator module

The Quantum Data 980 HDMI 2.0 Video Generator module can be installed in the 980B or 980R Advanced Test Platforms. This 980 HDMI 2.0 Video Generator module serves the generic test functions called out in the HDMI 2.0 Generic CTS. Refer to the table below:

Item	Quantum Data Equipment	
1	980 Advanced Test Platform series:	
	Equipped with:	980 HDMI 2.0 Video Generator module
		HDMI CTS 2.0 Compliance Test Package #4

980 HDMI 2.0 Video Generator Module with 980 Series Platform Configurations

The figures below show depictions of the 980 HDMI 2.0 Video Generator module equipped in various 980 series platforms. **Note:** Card positioning may vary depending on configuration.

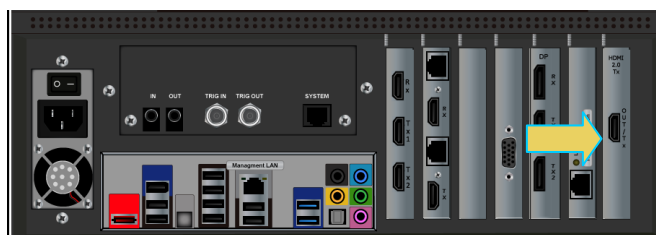

Sink TMDs Protocol – 6G – Scrambling

Test ID HF2-5 - Sink TMDS Protocol – 6G – Scrambling

1. Objective

Confirm that the Sink sets the Scrambling_Status bit to a 1.



2. Test Overview

The Pass/Fail criteria for this test is assessed by user observation of an image displayed on the sink device under test.

3. Procedure

Use the following procedure to conduct this test.

1. Connect Sink DUT to the Quantum Data 980 HDMI 2.0 Video Generator module HDMI Tx port. Use a High Speed HDMI cable. Refer to the figures below for reference.

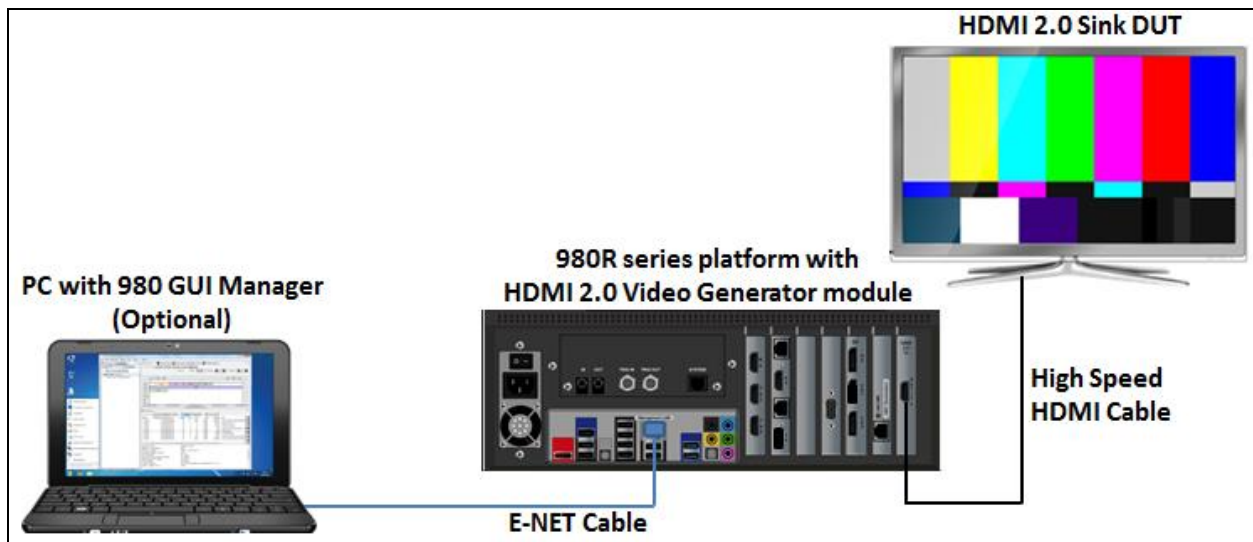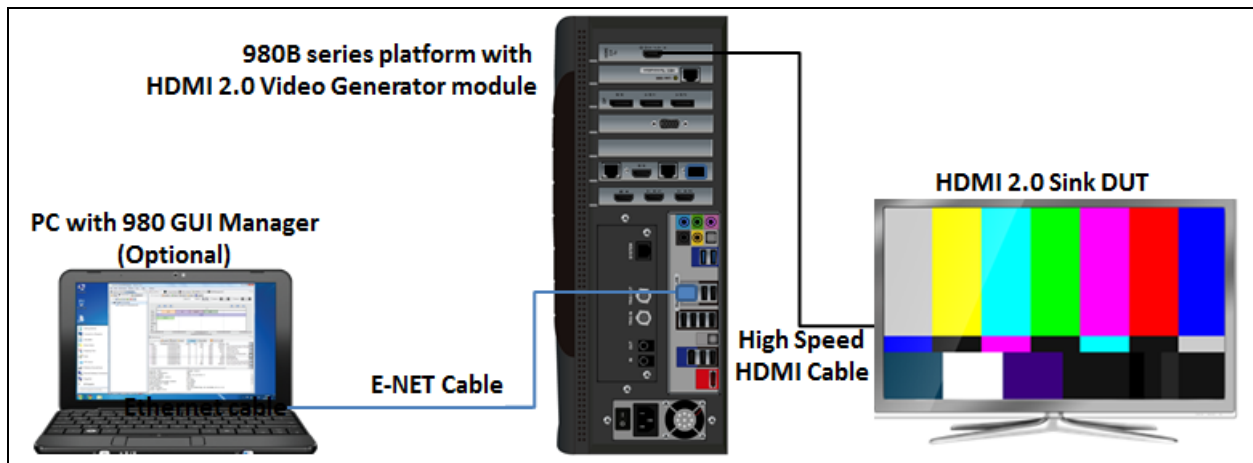


2. Use Quantum Data 980 Embedded Manager GUI (touchscreen) or invoke Quantum Data 980 External Manager GUI (Windows application).


Note: You will not need to connect the PC shown in the figures above if you are running the compliance test through the 980's embedded display. The PC running the 980 HDMI 2.0 Video Generator module's compliance test application is connected to the 980 through a standard Ethernet cable.

3. Complete the following steps:


- 3.1 Click on the HDMI Sink CTS 2.0 icon in the Compliance Tests page of the Apps panel. Refer to the screen example below.

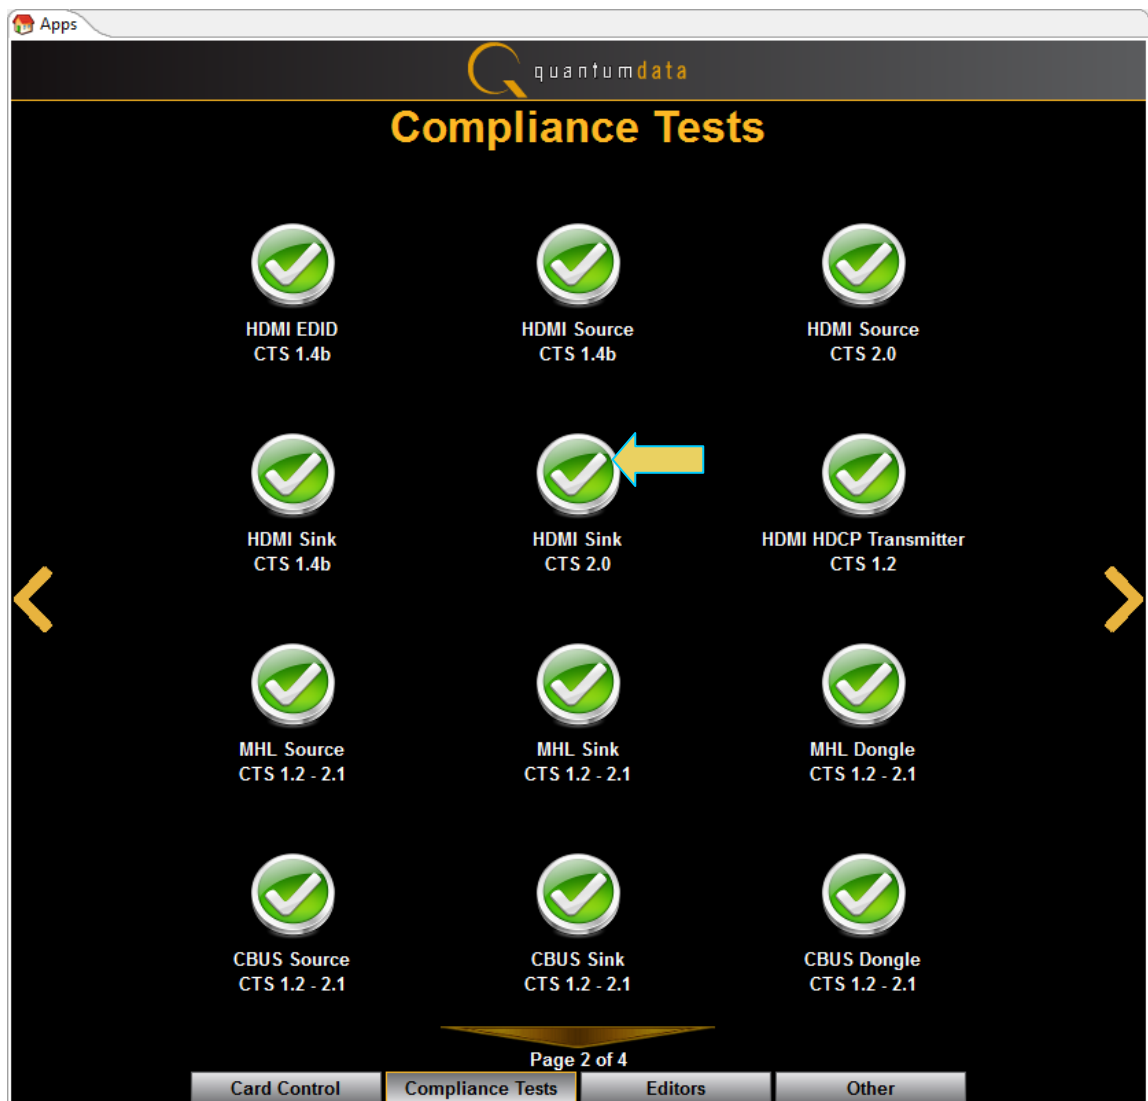

- 3.2 Navigate to the CDF tab if not already there. Complete the General sub tab and the 6G Video sub tab in the CDF. If there is a saved CDF file, then click on Open and select it. Otherwise, enter the DUT's CDF information and optionally click on Save to save the CDF. Refer to the screen example below.

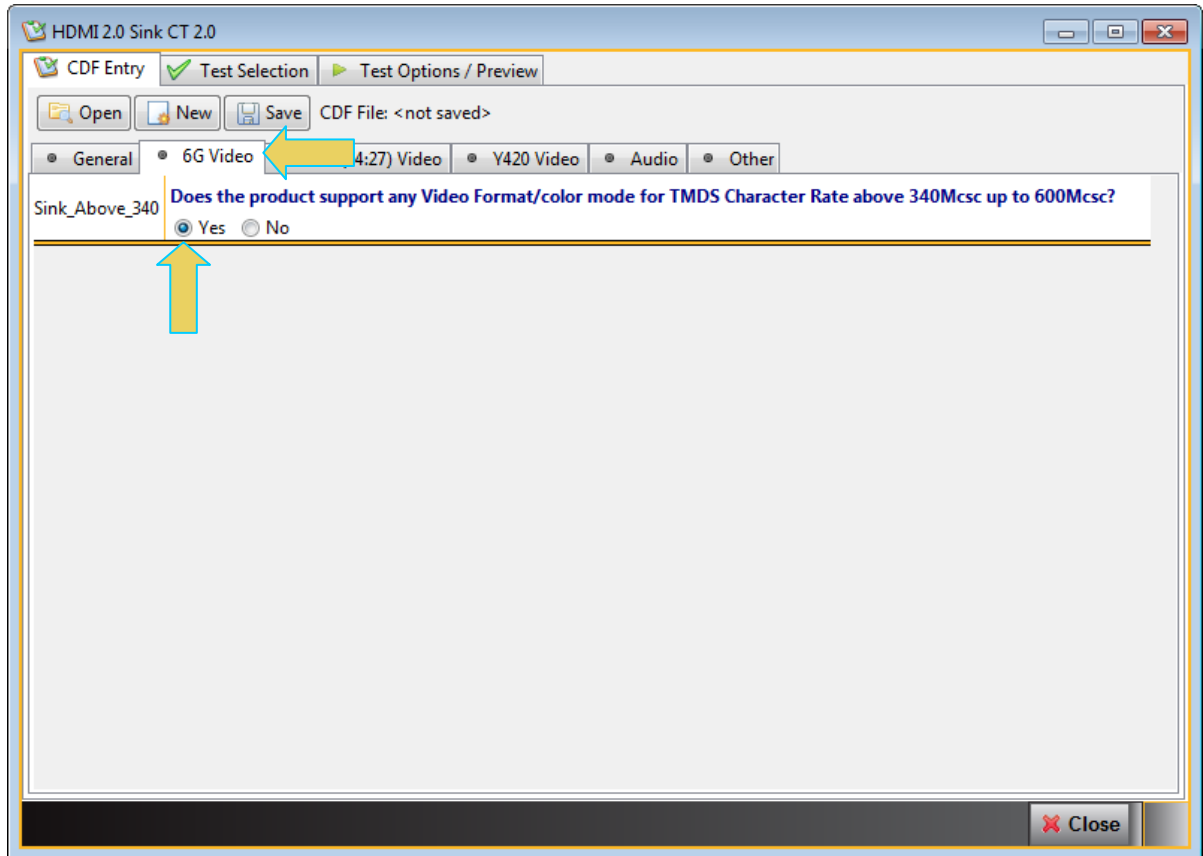


- 3.3 Click on the Test Selection tab, and select the TMDS Protocol tab and then the Test ID HF2-5 - TMDS Protocol – 6G – Scrambling Test. Refer to the screen example below.

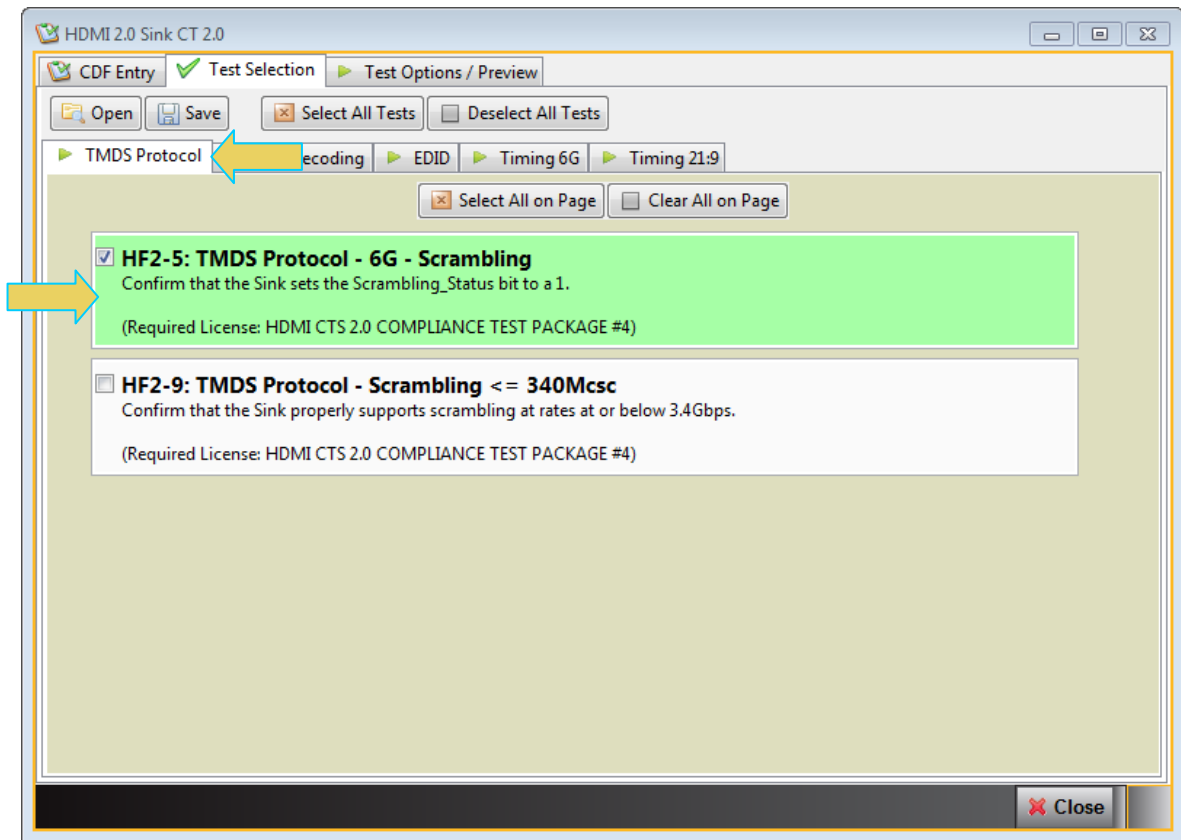


-
- HDMI 2.0 Sink CT 2.0
- CDF Entry ☒ Test Selection ☐ Test Options / Preview
- Test List
- All ☒ ☐ Instrument: 980B_JB [192.168.254.132]
- | Category / Test Name | |
|--|-------------------------------------|
| TMD5 Protocol | <input checked="" type="checkbox"/> |
| HF2-5: TMD5 Protocol - 6G - Scrambling | <input checked="" type="checkbox"/> |
| • Iter 01: | <input checked="" type="checkbox"/> |
- Close



- 3.5 Click on the Execute tests activation button to initiate the test. Refer to the screen example below.

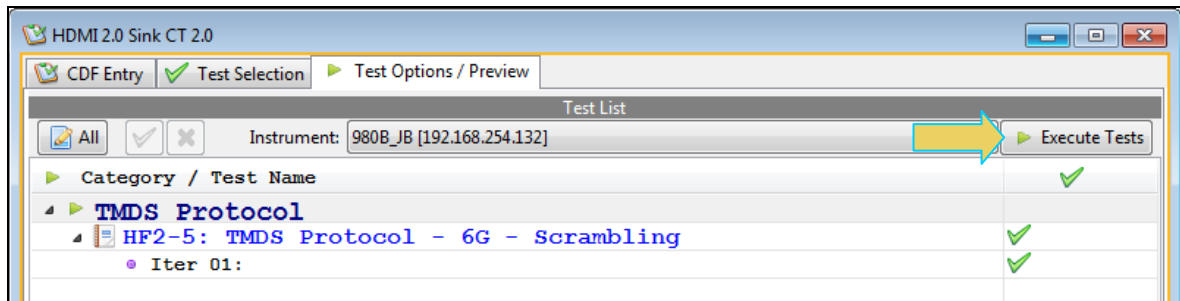


Note: You will be prompted with a dialog box to assign a name to the test results. Refer to the screen example below.

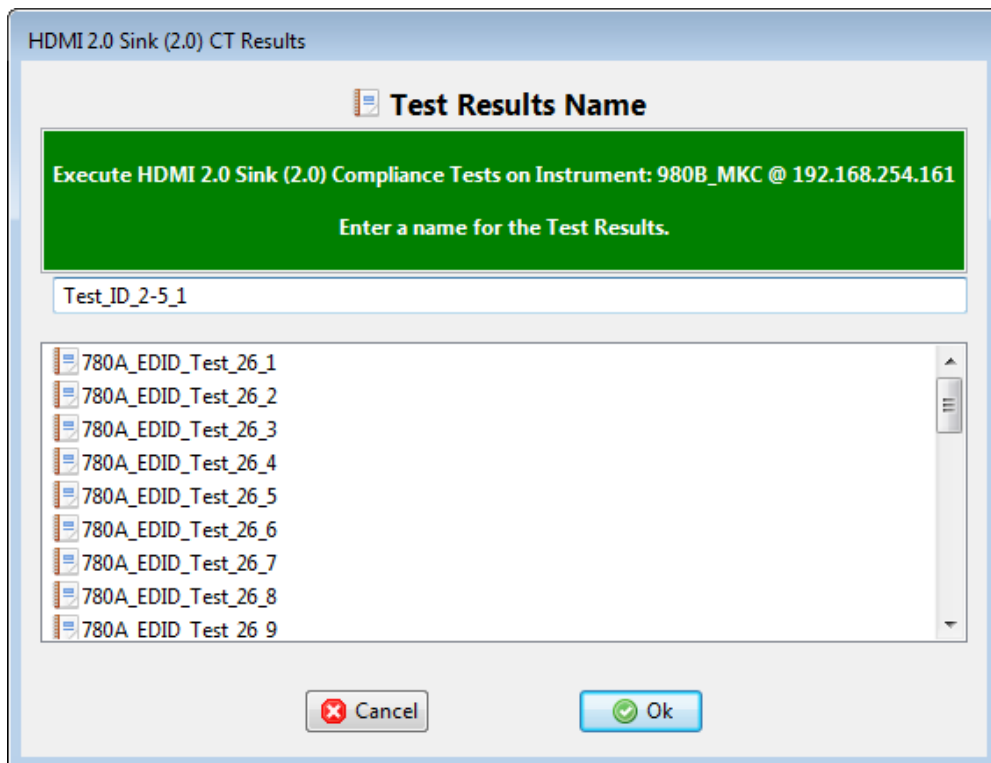


A Test Results window and log will appear and you will be prompted with the test setup description. Verify the test setup and click on Continue to run the test.

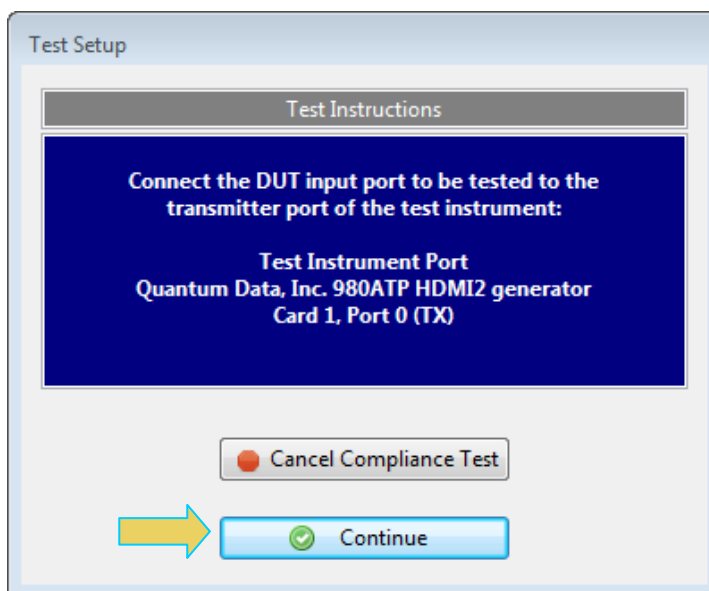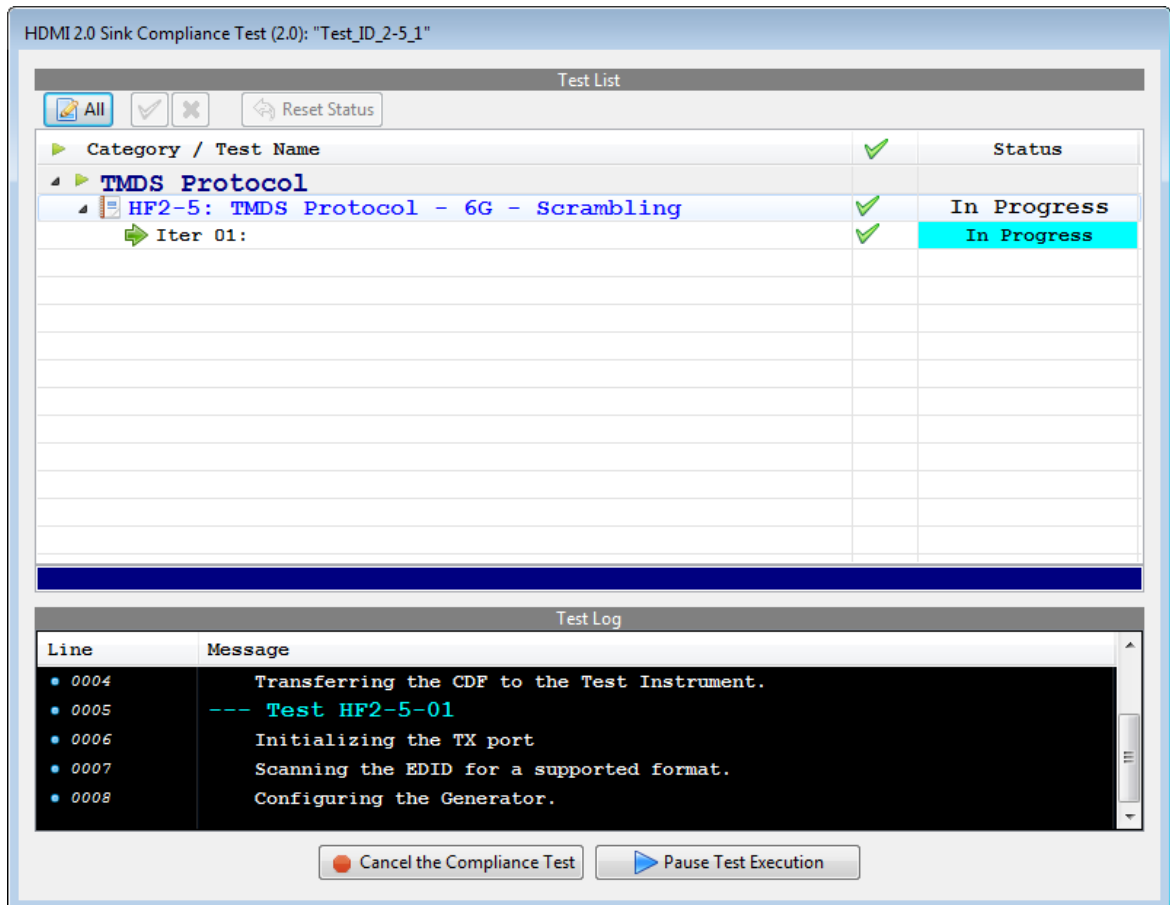

The test results will be assessed user examination as described in the following dialog box. Click on the PASS or FAIL button depending on whether the image looks correct or not.

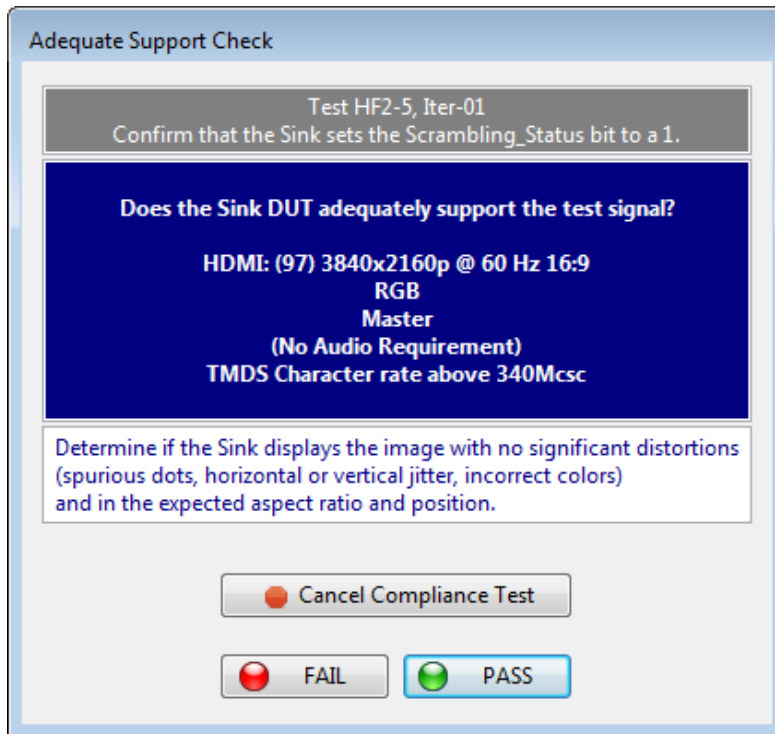

The results are indicated on the test window as shown below.

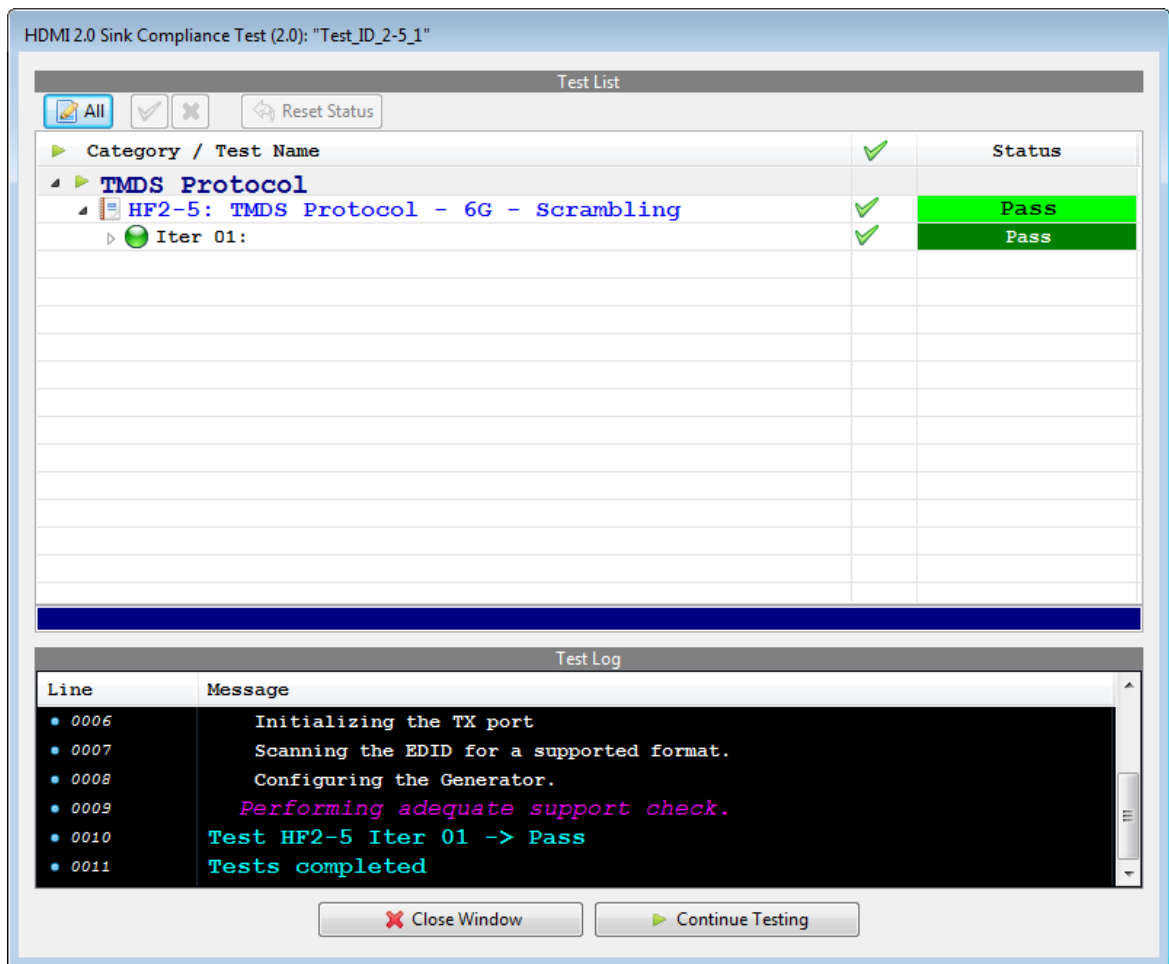

4. If the 980 HDMI 2.0 sink compliance test application reports PASS, then PASS. If the 980 HDMI 2.0 sink compliance test application reports FAIL, then FAIL.

When the test is completed a Test Results Viewer screen will appear. Note that tests are skipped if the EDID does not support a particular format.

